


## CYLINDER ACCESSORIES


### CYLINDER LIFTING HANDLES

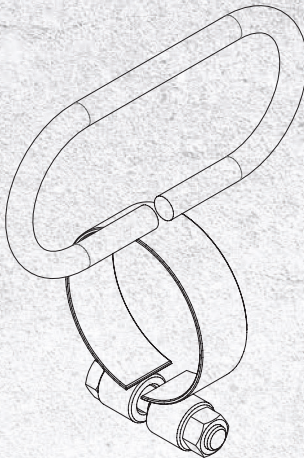

- Designed for ease of carrying
- Provides better control for positioning cylinder

| Model Number | For Cylinders                           |
|--------------|-----------------------------------------|
| LH25T34      | H2504 through H2514                     |
| LH30T40      | H3008, HD3008, HD3014, HC2002T, HC2006T |
| LH30T45      | HC3002T, HC3006T, HD3007, HDC3010       |
| LH55T49      | HLN5504 through HLN5512                 |


### CLEVIS AND TANGS

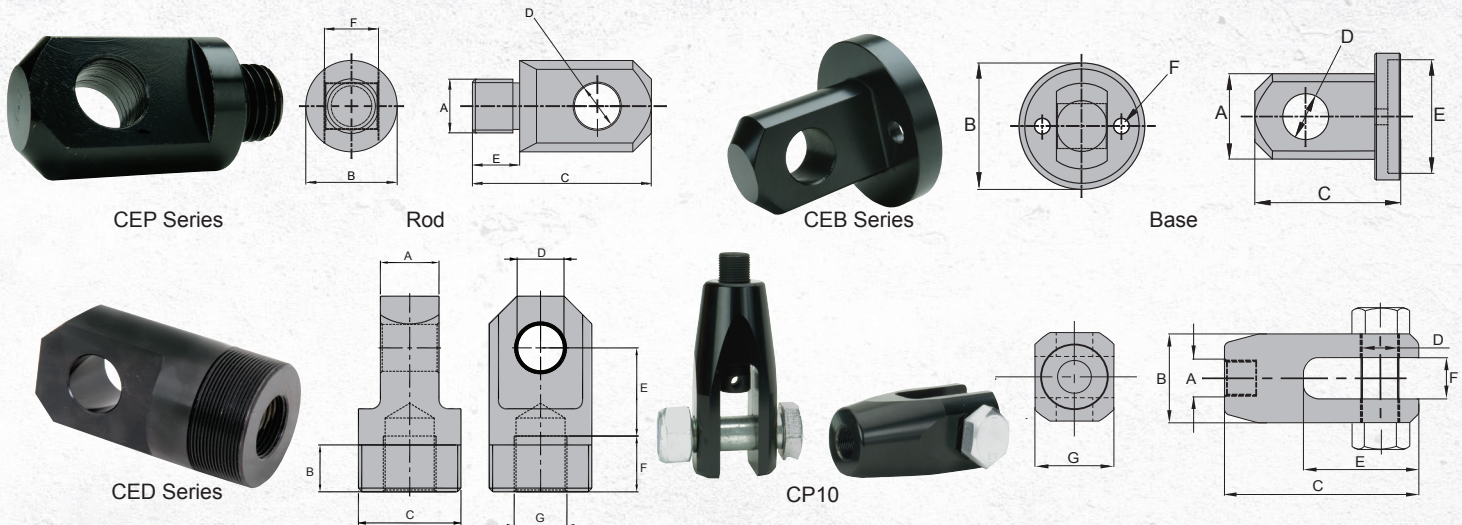

| Application | For use with<br>Cylinder Capacity<br>(tons) | Model<br>Number | Dimensions (in) |      |             |      |      |      |        |
|-------------|---------------------------------------------|-----------------|-----------------|------|-------------|------|------|------|--------|
|             |                                             |                 | A               | B    | C           | D    | E    | F    | G      |
| Rod         | 5                                           | CEP05           | ¾"-16UNF        | 1.13 | 2.25        | 0.63 | 0.62 | 0.56 | -      |
|             | 10                                          | CEP10           | 1"-8UNC         | 1.69 | 3.31        | 0.88 | 0.75 | 1.00 | -      |
|             | 15                                          | CEP15           | 1"-8UNC         | 1.69 | 3.31        | 0.88 | 0.75 | 1.00 | -      |
|             | 25                                          | CEP25           | 1½"-16          | 2.25 | 3.81        | 1.25 | 0.87 | 1.50 | -      |
| Base        | 5                                           | CEB05           | 1.52            | 1.75 | 2.13        | 0.63 | 0.26 | 1.13 | -      |
|             | 10                                          | CEB10           | 2.28            | 2.50 | 2.87        | 0.88 | 1.69 | 0.32 | -      |
|             | 15                                          | CEB15           | 2.77            | 3.00 | 2.87        | 0.88 | 1.69 | 0.38 | -      |
|             | 25                                          | CEB25           | 3.40            | 3.75 | 3.37        | 1.25 | 2.25 | 0.56 | -      |
| Rod & Base  | 9                                           | CED09           | 1               | 1    | 1-11/16"-18 | 0.75 | 1.31 | 0.94 | ¾"-16  |
|             | 16                                          | CED16           | 1.25            | 1    | 2-3/16"-16  | 1    | 1.88 | 1.19 | 1½"-12 |
|             | HP1006 only                                 | CP10*           | M30x2           | 2.95 | 6.30        | 1.18 | 3.74 | 1.38 | 2.56   |

\* 2-pc set with an adapter

## BASES

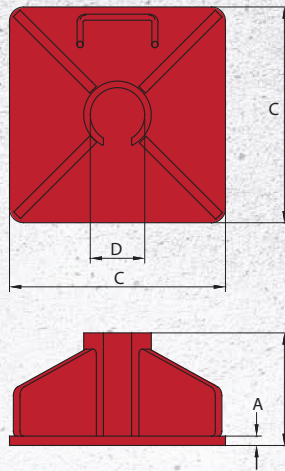

| For use with<br>Cylinder Capacity<br>(tons) | Model<br>Number | Dimensions<br>(in) |      |       |      |
|---------------------------------------------|-----------------|--------------------|------|-------|------|
|                                             |                 | A                  | B    | C     | D    |
| 5                                           | CB05            | 0.32               | 4.65 | 7.87  | 1.54 |
| 10                                          | CB10            | 0.39               | 4.72 | 9.06  | 2.28 |
| 15                                          | CB15            | 0.47               | 4.80 | 10.00 | 2.76 |
| 25                                          | CB25            | 0.63               | 4.96 | 11.02 | 3.41 |

## SADDLES



SD SERIES



SDT10



HTD10




FIGURE #1




FIGURE #2




FIGURE #3




FIGURE #4

| Saddle Type | Model Number | Capacity (ton) | For Cylinder(s)                              | Dimensions (in) |      |         |      | Figure Number |
|-------------|--------------|----------------|----------------------------------------------|-----------------|------|---------|------|---------------|
|             |              |                |                                              | A               | B    | C       | D    |               |
| Tilt        | SDT05        | 5              | H05                                          | 0.98            | 1.22 | -       | 0.63 | 2             |
|             | SDT10        | 10             | H10                                          | 1.38            | 1.50 | -       | 0.74 | 2             |
|             | SDT15        | 15             | H15                                          | 1.50            | 1.57 | -       | 0.73 | 2             |
|             | SDT25        | 25             | H25                                          | 1.97            | 1.6  | -       | 1.29 | 2             |
|             | SDT55        | 55-100         | H55, HD55, H75, HD75, H100, HLN55 and HLN100 | 2.80            | 1.29 | 0.67    | 0.51 | 2             |
|             | SDTG100      | 100            | HG100/HDG100                                 | 2.95            | 2.64 | 1.71    | 0.79 | 4             |
|             | SDTG150      | 150            | HG150/HDG150                                 | 3.70            | 2.71 | 1.77    | 0.77 | 4             |
|             | SDTG200      | 200            | HG200/HDG200                                 | 4.45            | 3.25 | 1.95    | 1.10 | 4             |
|             | SDT200       | 200            | HLN 150/HLN200                               | 5.12            | 1.77 | 1.02    | 0.53 | 4             |
| Grooved     | SD05         | 5              | H05                                          | 0.98            | 0.81 | -       | 0.24 | 1             |
|             | SD10         | 10             | H10                                          | 1.38            | 1.06 | -       | 0.24 | 1             |
|             | SD15         | 15             | H15                                          | 1.50            | 1.18 | -       | 0.28 | 1             |
|             | SD25         | 25             | H25                                          | 1.97            | 1.14 | -       | 0.28 | 1             |
| Threaded    | HTD10        | 10             | HT1006 & HT1010                              | 1 1/4"-11.5NPTF | 0.95 | 1"-8UNC | 1.77 | 3             |